

PRODUCT DRAWING

CUSTOMER NO.:

FILENAME:

REVISION:

DRAWING OF TIC5234

ORIGINAL DATE: 30 APR 2003

TOTAL PAGES: 4

- INITIATE
 REVISE

EFFECTIVE DATE:

REVISIONS

REV	DESCRIPTION	DATE

ORIGINATOR

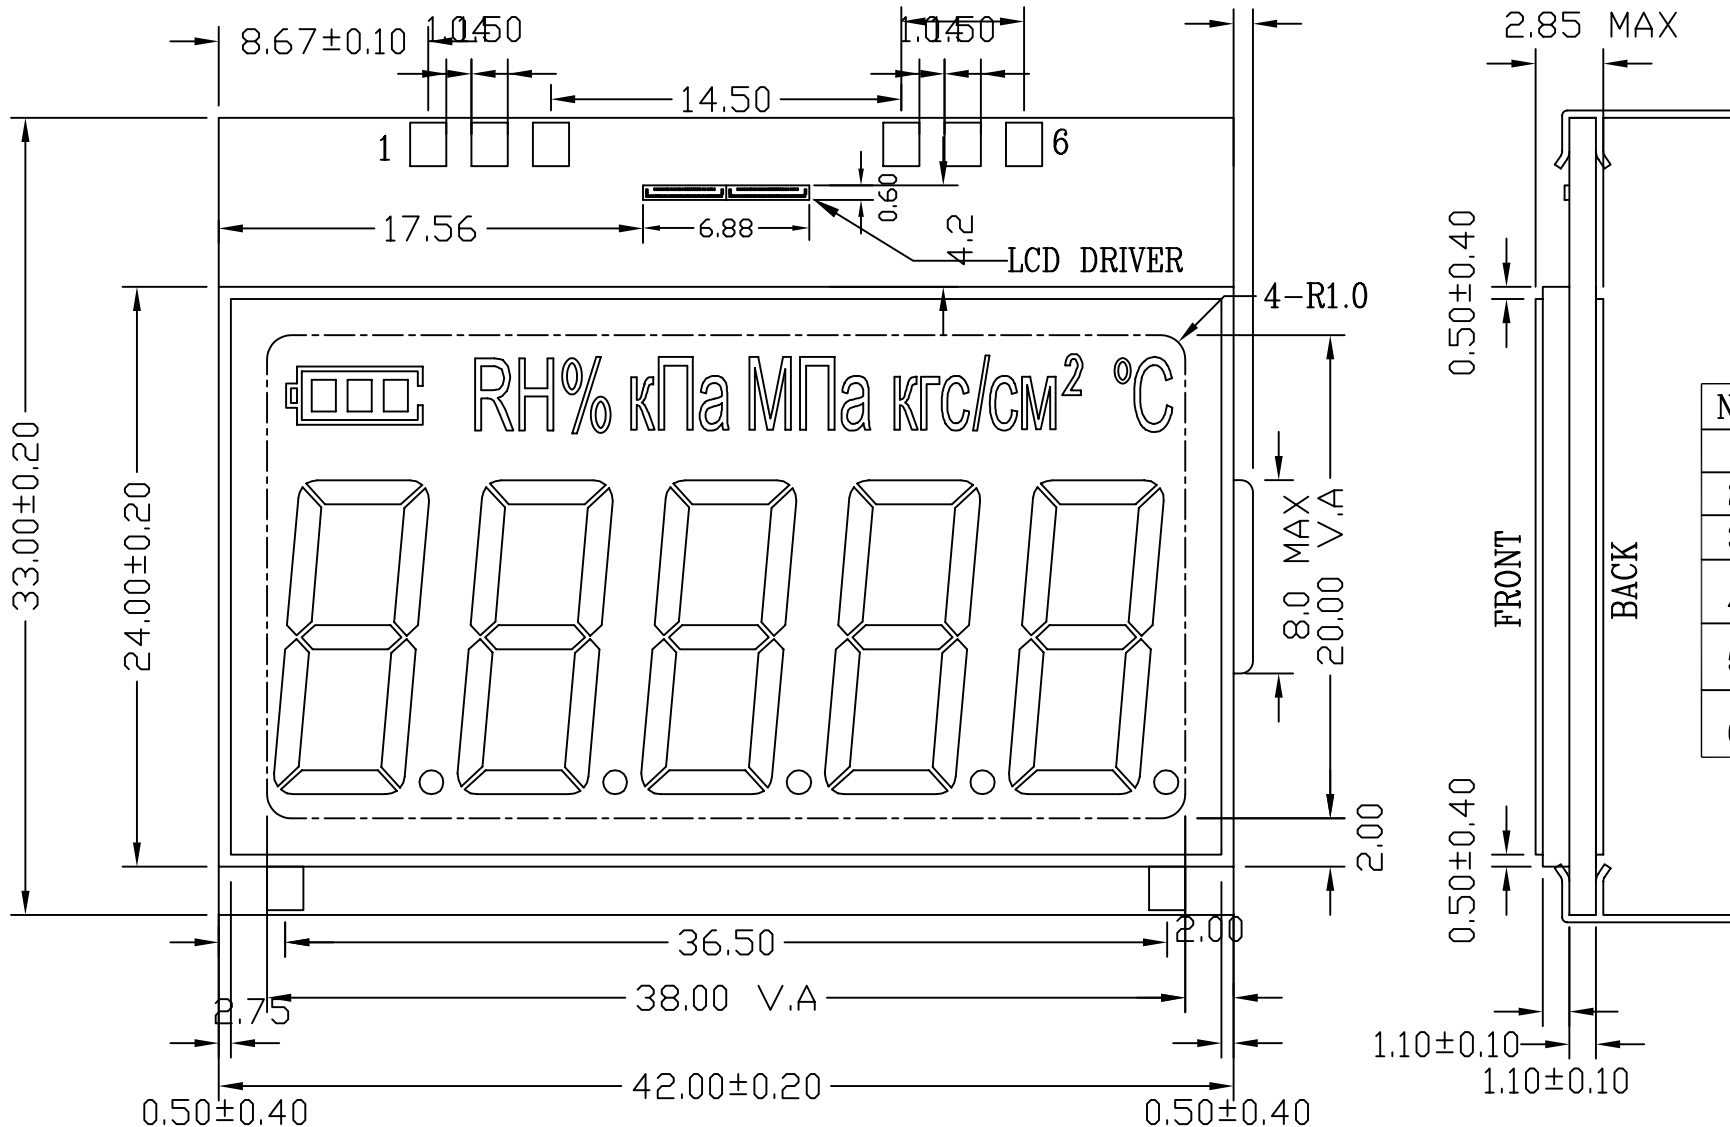
DESIGN MGR.



Please sign and fax back this page to confirm this drawing.
Please indicate if you need samples.



Authorized Signatures

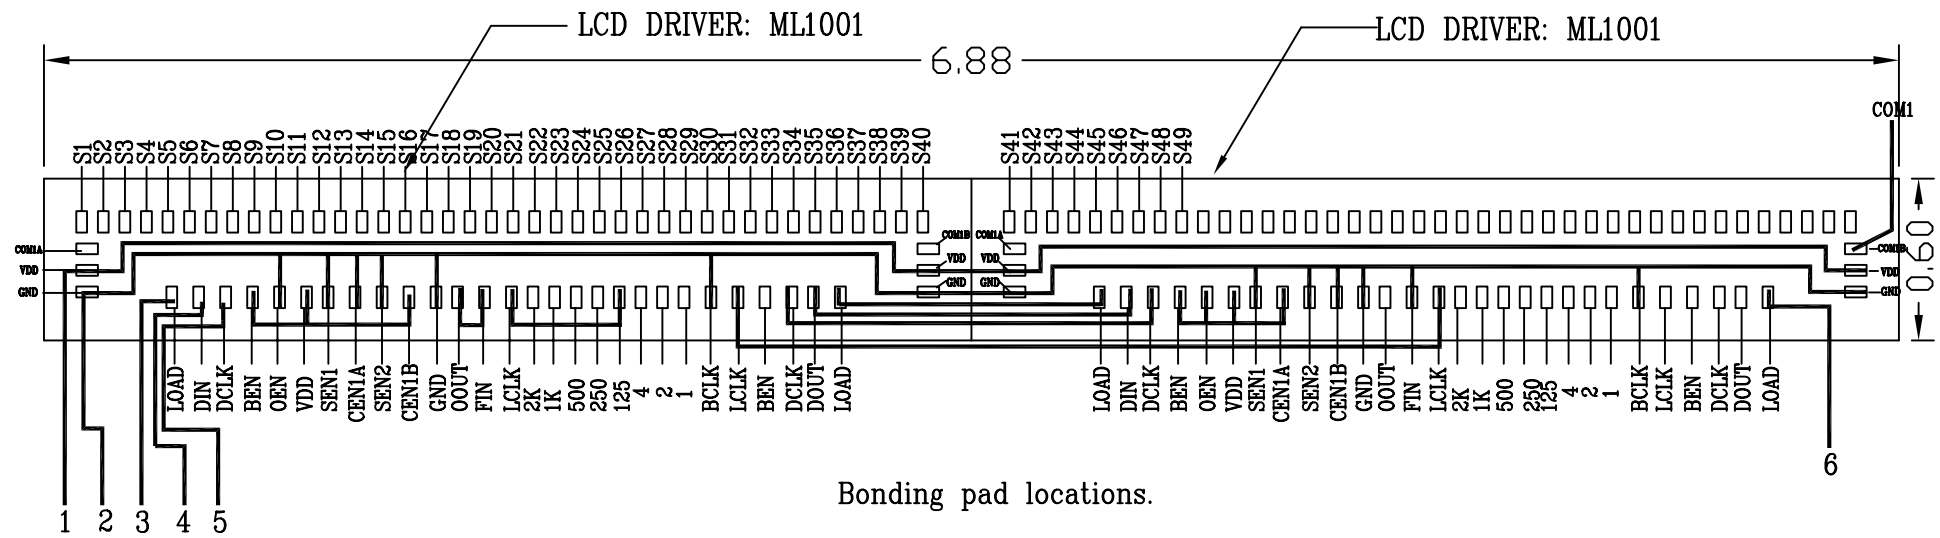
PITCH 2.54X2=5.08 0.8 MAX



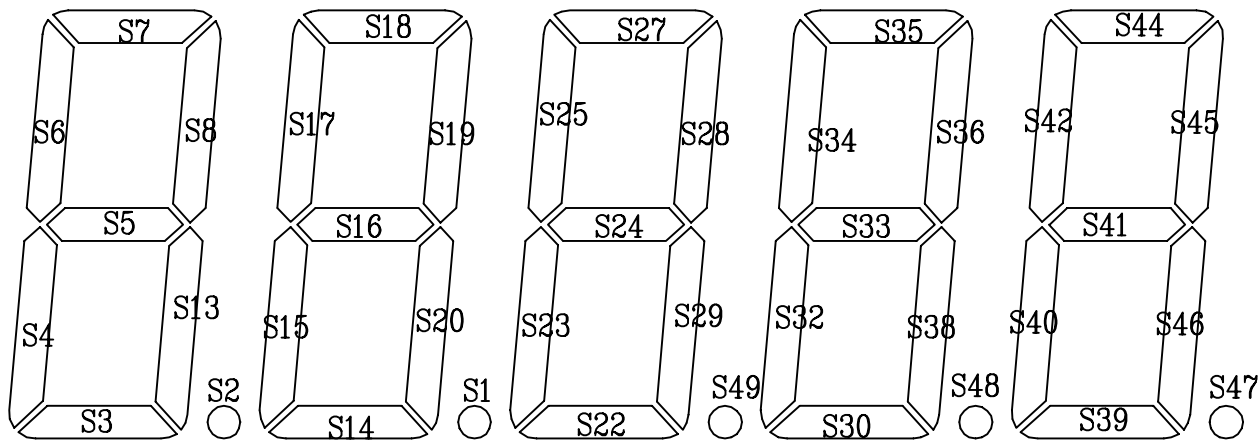
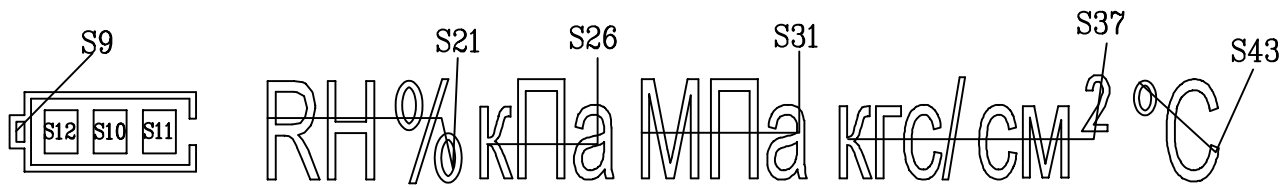
NO	SYMBOL
1	VDD
2	GND
3	LOAD
4	DIN
5	DCLK
6	CHK

REV



Designed by:		TIC5234	
Checked by:			
Approved by:		  Unit: mm	
Filename:			Sheet: 2 OF 4



Bonding pad locations.



REV

Designed by:	TIC5234
Checked by:	
Approved by:	 
Filename:	
	Unit: mm
	Sheet: 2 OF 4

A. Dimensions:

1. Length of top glass:

42.00±0.20 mm

Width of top glass:

24.00±0.20 mm

2. Length of bottom glass:

42.00±0.20 mm

Width of bottom glass:

33.00±0.20 mm

3. Thickness of LCD(max):

2.85 mm

4. Thickness of glass:

Top: 1.10 mm

Bottom: 1.10 mm

5. Length of viewing area:

Horizontal: 38.00 mm

Vertical: 20.00 mm

B. Display specification:

1. Duty: STATIC

2. Bias: _____

3. Operating voltage: 5.0 V

4. Viewing angle: 6:00

5. Temperature:

Operating: -20 TO +70°C

Storage: -25 TO +80°C

6. Polarizer:

Top: TRANSMISSIVE


Bottom: REFLECTIVE

7. End seal: RIGHT

8. Length of pin: _____ mm

Pitch of pin: 2.54 mm

REV

Designed by:		TIC5234	
Checked by:			
Approved by:			Unit: mm
Filename:			Sheet: 4 OF 4