

September 1983 Revised January 2005

#### **MM74HC14**

## **Hex Inverting Schmitt Trigger**

#### **General Description**

The MM74HC14 utilizes advanced silicon-gate CMOS technology to achieve the low power dissipation and high noise immunity of standard CMOS, as well as the capability to drive 10 LS-TTL loads.

The 74HC logic family is functionally and pinout compatible with the standard 74LS logic family. All inputs are protected from damage due to static discharge by internal diode clamps to  $V_{\mbox{\footnotesize CC}}$  and ground.

#### **Features**

- Typical propagation delay: 13 ns
- Wide power supply range: 2-6V
- Low quiescent current: 20 µA maximum (74HC Series)
- Low input current: 1 µA maximum
- Fanout of 10 LS-TTL loads
- Typical hysteresis voltage: 0.9V at V<sub>CC</sub> = 4.5V

#### **Ordering Code:**


Order Number	Package Number	Package Description				
MM74HC14M	M14A	14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow				
MM74HC14MX_NL	M14A	Pb-Free 14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow				
MM74HC14SJ	M14D	Pb-Free 14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide				
MM74HC14MTC	MTC14	14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide				
MM74HC14MTCX_NL	MTC14	Pb-Free 14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide				
MM74HC14N	N14A	14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide				
MM74HC14N_NL	N14A	Pb-Free 14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide				

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code. Pb-Free package per JEDEC J-STD-020B.

#### **Connection Diagram**

# Pin Assignments for DIP, SOIC, SOP and TSSOP **Top View**

#### **Logic Diagram**



#### **Absolute Maximum Ratings**(Note 1)

(Note 2)

Supply Voltage ( $V_{CC}$ )

DC Input Voltage (V<sub>IN</sub>)

DC Output Voltage (V<sub>OUT</sub>)

Clamp Diode Current (I<sub>IK</sub>, I<sub>OK</sub>)

DC Output Current, per pin (I<sub>OUT</sub>)

**Conditions** -0.5 to +7.0V

-1.5 to  $V_{CC} + 1.5V$ 

-0.5 to  $V_{CC}\, {+} 0.5 V$ 

±20 mA

±25 mA

260°C

Max Units Supply Voltage ( $V_{CC}$ ) 6 DC Input or Output Voltage  $V_{CC}$ V  $(V_{IN}, V_{OUT})$ 

**Recommended Operating** 

Operating Temperature Range (T<sub>A</sub>) °С -40+85

DC  $\mathrm{V}_{\mathrm{CC}}$  or GND Current, per pin ±50 mA Storage Temperature Range  $(T_{STG})$  $-65^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$ 

Power Dissipation (P<sub>D</sub>)

(Note 3) 600 mW S.O. Package only 500 mW

Lead Temperature (T<sub>L</sub>)

(Soldering 10 seconds)

Note 1: Absolute Maximum Ratings are those values beyond which damage to the device may occur.

Note 2: Unless otherwise specified all voltages are referenced to ground. Note 3: Power Dissipation temperature derating — plastic "N" package: -

12 mW/°C from 65°C to 85°C.

#### DC Electrical Characteristics (Note 4)

Symbol	Parameter	Conditions	v <sub>cc</sub>	T <sub>A</sub> = 25°C		$T_A = -40 \text{ to } 85^{\circ}\text{C}$	T <sub>A</sub> = -55 to 125°C	Units
Symbol			• CC	Тур		Guaranteed L	imits	Units
V <sub>T+</sub>	Positive Going	Minimum	2.0V	1.2	1.0	1.0	1.0	V
	Threshold Voltage		4.5V	2.7	2.0	2.0	2.0	V
			6.0V	3.2	3.0	3.0	3.0	V
		Maximum	2.0V	1.2	1.5	1.5	1.5	V
			4.5V	2.7	3.15	3.15	3.15	V
			6.0V	3.2	4.2	4.2	4.2	V
$V_{T-}$	Negative Going	Minimum	2.0V	0.7	0.3	0.3	0.3	V
	Threshold Voltage		4.5V	1.8	0.9	0.9	0.9	V
			6.0V	2.2	1.2	1.2	1.2	V
		Maximum	2.0V	0.7	1.0	1.0	1.0	V
			4.5V	1.8	2.2	2.2	2.2	V
			6.0V	2.2	3.0	3.0	3.0	V
V <sub>H</sub>	Hysteresis Voltage	Minimum	2.0V	0.5	0.2	0.2	0.2	V
			4.5V	0.9	0.4	0.4	0.4	V
			6.0V	1.0	0.5	0.5	0.5	V
		Maximum	2.0V	0.5	1.0	1.0	1.0	V
			4.5V	0.9	1.4	1.4	1.4	V
			6.0V	1.0	1.5	1.5	1.5	V
V <sub>OH</sub>	Minimum HIGH Level	$V_{IN} = V_{IL}$	2.0V	2.0	1.9	1.9	1.9	V
	Output Voltage	$ I_{OUT}  = 20 \mu A$	4.5V	4.5	4.4	4.4	4.4	V
			6.0V	6.0	5.9	5.9	5.9	V
		$V_{IN} = V_{IL}$						
		$ I_{OUT}  = 4.0 \text{ mA}$	4.5V	4.2	3.98	3.84	3.7	V
		$ I_{OUT}  = 5.2 \text{ mA}$	6.0V	5.7	5.48	5.34	5.2	V
V <sub>OL</sub>	Maximum LOW Level	$V_{IN} = V_{IH}$	2.0V	0	0.1	0.1	0.1	V
	Output Voltage	$ I_{OUT}  = 20 \mu A$	4.5V	0	0.1	0.1	0.1	V
			6.0V	0	0.1	0.1	0.1	V
		$V_{IN} = V_{IH}$						
		$ I_{OUT}  = 4.0 \text{ mA}$	4.5V	0.2	0.26	0.33	0.4	V
		I <sub>OUT</sub>   = 5.2 mA	6.0V	0.2	0.26	0.33	0.4	V
I <sub>IN</sub>	Maximum Input Current		6.0V		±0.1	±1.0	±1.0	μΑ
I <sub>CC</sub>	Maximum Quiescent	$V_{IN} = V_{CC}$ or GND	6.0V		2.0	20	40	μΑ
	Supply Current	$I_{OUT} = 0 \mu A$						

Note 4: For a power supply of 5V  $\pm$ 10% the worst case output voltages (V<sub>OH</sub>, and V<sub>OL</sub>) occur for HC at 4.5V. Thus the 4.5V values should be used when designing with this supply. Worst case  $V_{IH}$  and  $V_{IL}$  occur at  $V_{CC} = 5.5V$  and 4.5V respectively. (The  $V_{IH}$  value at 5.5V is 3.85V.) The worst case leakage curvature of the  $V_{IH}$  value at 5.5V is 3.85V.) rent ( $I_{IN}$ ,  $I_{CC}$ , and  $I_{OZ}$ ) occur for CMOS at the higher voltage and so the 6.0V values should be used.

#### **AC Electrical Characteristics**

 $V_{CC} = 5V$ ,  $T_A = 25^{\circ}C$ ,  $C_L = 15$  pF,  $t_r = t_f = 6$  ns

Symbol	Parameter	Conditions	Тур	Guaranteed Limit	Units
t <sub>PHL</sub> , t <sub>PLH</sub>	Maximum Propagation Delay		12	22	ns


#### **AC Electrical Characteristics**


 $\mbox{V}_{CC} = 2.0\mbox{V}$  to 6.0V,  $\mbox{C}_L = 50$  pF,  $\mbox{t}_f = \mbox{t}_f = 6$  ns (unless otherwise specified)

Symbol	Parameter	Conditions	V <sub>CC</sub>	T <sub>A</sub> = 25°C		$T_A = -40 \text{ to } 85^{\circ}\text{C}$	T <sub>A</sub> = -55 to 125°C	Units	
Cyllibol	i arameter			Тур	Typ Guaranteed Limits				
t <sub>PHL</sub> , t <sub>PLH</sub>	Maximum Propagation		2.0V	60	125	156	188	ns	
	Delay		4.5V	13	25	31	38	ns	
			6.0V	11	21	26	32	ns	
t <sub>TLH</sub> , t <sub>THL</sub>	Maximum Output Rise		2.0V	30	75	95	110	ns	
	and Fall Time		4.5V	8	15	19	22	ns	
			6.0V	7	13	16	19	ns	
C <sub>PD</sub>	Power Dissipation	(per gate)		27				pF	
	Capacitance (Note 5)								
C <sub>IN</sub>	Maximum Input Capacitance			5	10	10	10	pF	

Note 5: C<sub>PD</sub> determines the no load dynamic power consumption, P<sub>D</sub> = C<sub>PD</sub> V<sub>CC</sub>2 f + I<sub>CC</sub> V<sub>CC</sub>, and the no load dynamic current consumption, I<sub>S</sub> = C<sub>PD</sub> V<sub>CC</sub> f + I<sub>CC</sub>.

#### **Typical Performance Characteristics**





# **Typical Applications**


**Low Power Oscillator** 



$$t_1 \approx RC \ln \frac{V_{T+1}}{V_{T-1}}$$


$$t_2 \approx RC \ln \frac{V_{CC} - V_{T-}}{V_{CC} - V_{T+}}$$

V<sub>cc</sub> -----




$$f \approx \frac{1}{RC \ln \frac{V_{T+}(V_{CC} - V_{T-})}{V_{T-}(V_{CC} - V_{T+})}}$$


Note: The equations assume  $\rm t_{1} + t_{2} >> t_{pd0} + t_{pd1}$ 

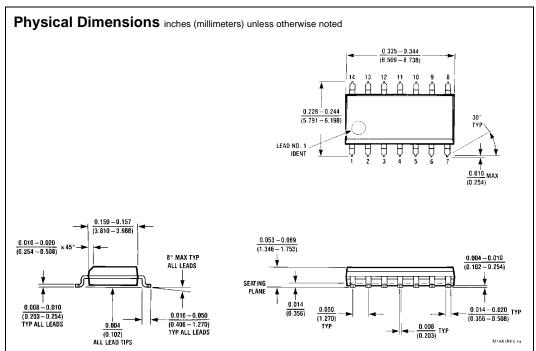



14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow Package Number M14A

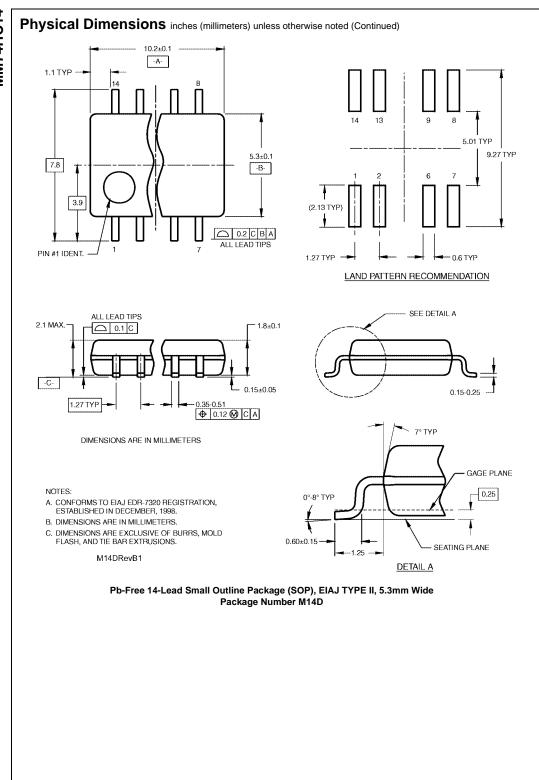


### Physical Dimensions inches (millimeters) unless otherwise noted (Continued)










#### NOTES:


- A. CONFORMS TO JEDEC REGISTRATION MO-153, VARIATION AB, REF NOTE 6, DATED 7/93
- B. DIMENSIONS ARE IN MILLIMETERS
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS
  D. DIMENSIONING AND TOLERANCES PER ANSI Y14-5M, BY


MTC14revD




14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide Package Number MTC14

#### Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

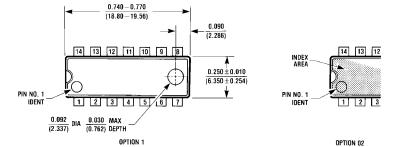





14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide Package Number N14A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.